

ZigBee Door Window Sensor User Manual



www.thehonorlink.com
Model: HL-GM02

Thanks for choosing our product
You have the ability to monitor the real-time open/close status of your doors and windows, ensuring enhanced security and protection against burglary

Specification:



Material: ABS
Size: 54*26.5*13mm (Sensor)
34.5*12.5*12.5 mm (Magnet)
Battery: DC 3V (CR2032)
Battery Life: over 1 year (20 times per day)
Zigbee Frequency: IEEE 802.15.4
Working Temperature: 0 C ~ 55 C

What's in the box



-2-

Product Presentation:



-3-


Checklist before usage:

- Zigbee gateway is available for configuration.
- Your smartphone has connected to a 2.4GHz Wi-Fi network.
- Input the correct Wi-Fi password.
- Your smartphone must be Android 4.4 + or iOS 8.0 +.
- Your Wi-Fi router is MAC-open.
- If the numbers of devices connected to the Wi-Fi router reach the limit, you can try to disable device to vacate channel or try another Wi-Fi router.

-4-

How to set up:

- Use your smartphone to scan below QR code, or search "Honorlink" app in Google Play Store or APP Store to download and install.

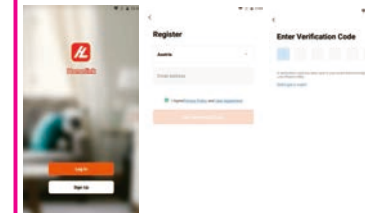


-5-

- Connect your mobile to your Wi-Fi router, click "+" in the upper right corner of homepage or click "Add Device". Select "Wireless Gateway (Zigbee)" from "Gateway Control".




- 1) Select "Blink Quickly", make sure the blue light is on and red light is blinking quickly, if not, hold the reset button about 5s till red indicator is blinking quickly.

-6-

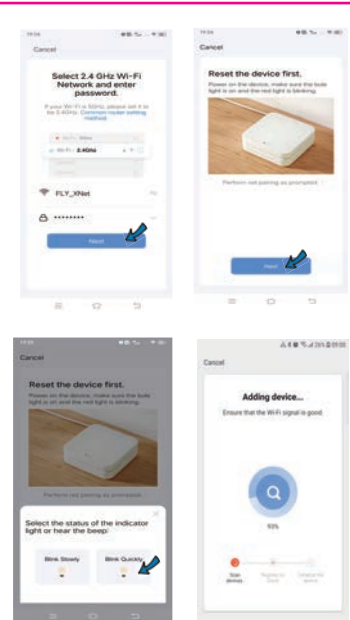

-7-

- You can also select "Blink Slowly", make sure the red indicator is blinking slowly, if not, hold the reset button for about 5s till red indicator is blinking slowly. Connect your mobile to the device's hotspot: "SmartLife-XXXX", then click to return to App interface, it will connect to Wi-Fi router automatically.

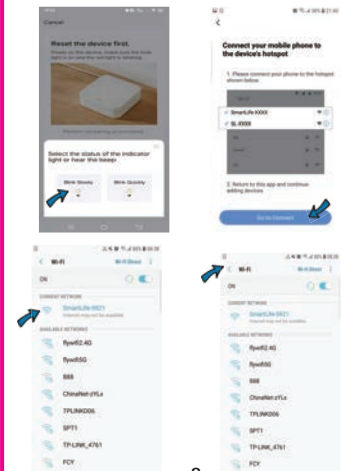


-8-

- Click "+" Add subdevice", then click "More device reset methods", select "Contact Sensor", then follow the steps.




-9-


- Take out the insulation sheet, if the LED indicator is not blinking rapidly, open the back cover, hold the reset button for about 5s till indicator is blinking rapidly.



- It will search nearby device automatically, and add successfully.

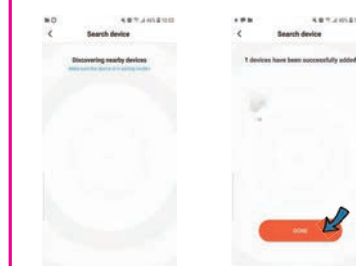

-10-

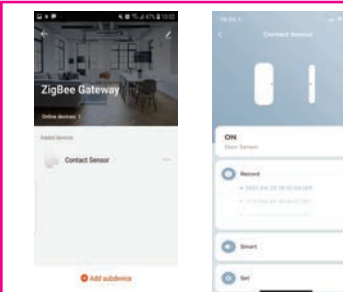


Installation

The door sensor can be installed on doors, windows and any other objects that can open and close. Before installation, please test whether the door sensor can work properly, make sure the door and frame is spaced correctly to accommodate the sensor.

Use a clean and dry towel to clean the area where you want to mount the door sensor. Tear off the adhesive tapes to place the sensors you want, press hard for about 10s to fix them well.


-11-



Adhesive tapes are for one-time use only.

Note:

The magnet must be placed on the side of the sensor aligned with arrow. And the distance between the sensor and magnet should be less than 10mm.



-12-