


Smart Wall Socket User Guide

M04

Notes Before Installation

1. Wi-Fi Only support a 2.4GHz network (802.11 b/g/n)
2. Basic electrical wiring knowledge or experience required, or please consult a professional electrician
3. Do not access more than the maximum power of the device design
4. ON/OFF Button also can be used as reset button, long press to reset your smart socket to factory defaults. Only do this if you are sure you want to erase all your settings

Smart Home

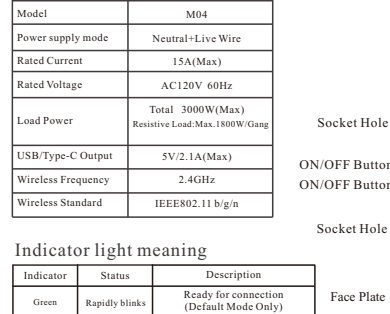


Specifications

Type	Smart Wall Socket
Model	M04
Power supply mode	Neutral-Line Wire
Rated Current	15A(Max)
Rated Voltage	AC120V 60Hz
Load Power	Total: 3000W(Max) Resistive Load Max: 1800W(Comp)
USB Type-C Output	5V/2.1A(Max)
Wireless Frequency	2.4GHz
Wireless Standard	IEEE802.11 b/g/n

Indicator light meaning

Indicator	Status	Description
Green	Rapidly blinks	Ready for connection (Default Mode Only)
Green	Slowly blinks (1 time every 3s)	Ready for connection (AP Mode Only)
Light on/off	On	Turn the light off
Light on/off	Off	Turn the light on
Green	Flash Slowly	No Internet

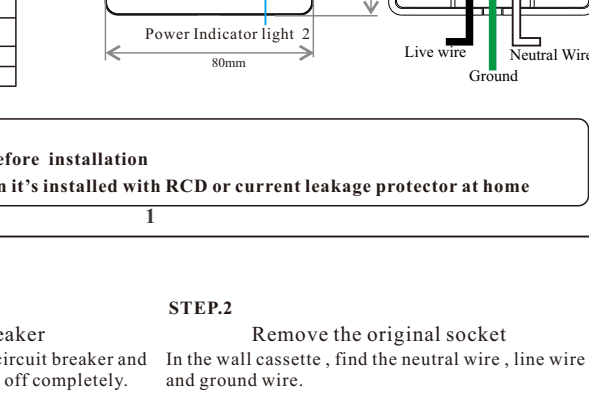


Safety Notice:
 • Cut off the power before installation
 • Please use it only when it's installed with RCD or current leakage protector at home

Installation Guide


STEP.1

Turn off circuit breaker
 Find your socket's control in your circuit breaker and turn it off, ensure the socket power off completely.

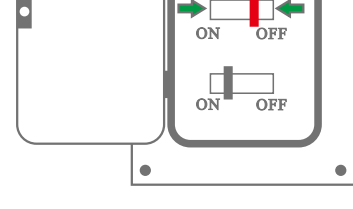

STEP.2


Remove the original socket
 In the wall cassette, find the neutral wire, line wire and ground wire.

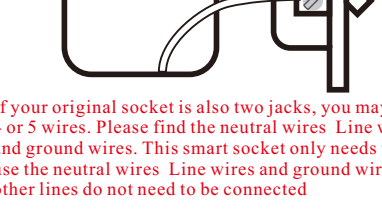

Warning: If your original socket is also two jacks, you may find 4 or 5 wires. Please find the neutral wires. Line wires and ground wires. This smart socket only needs to use the neutral wires. Line wires and ground wires, other lines do not need to be connected

STEP.3


Label your wires
 Mark or record the corresponding line before removing the old socket

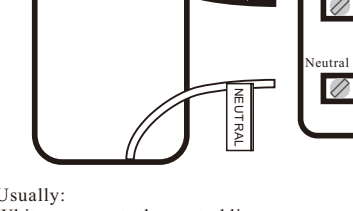

Usually:
 White represents the neutral line
 Black represents the fire line
 Green or yellow or a single bare copper wire representing the ground wire
 The above is for reference only and cannot be used as a standard.

STEP.4


Install socket
 Use wire-nuts to connect the socket wires to your home wires, following the diagram. Be careful to match line. Then remove the stickers, screw the socket into the wall. And attach the faceplate.

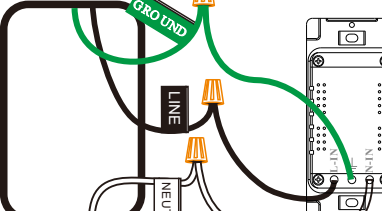

Warning: For safety, please connect the ground wire


STEP.5

Turn on circuit breaker
 Turn on your socket's power from the circuit breaker. Press the socket a few times to make sure it works.

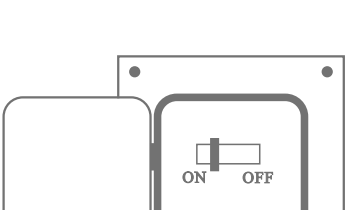



STEP.6

Check the Wi-Fi light
 Tap NEXT when the Wi-Fi indicator light blinks (2 times per second)



Install the "Honorlink" APP

Step A. Find out "Honorlink" app in Apple app store, Google Play, or scan the QR code below and install it.

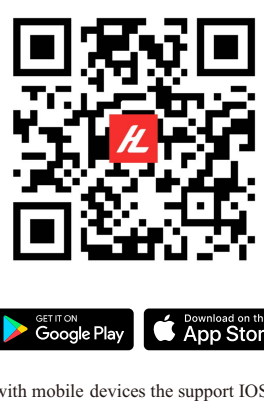

The free app "Honorlink" is compatible with mobile devices the support IOS8.0 above, Android 4.4 above

Step B. Enter the register interface, input the email address/phone number for getting the verification code to register an account. Please just login if you already have a Honorlink account.


Step C: Add the Socket to Honorlink APP

This smart socket can only support 2.4G network and can't work with 5G network. Please check if your home network is 2.4G and make sure that your phone has been connected to the 2.4G WiFi router.


1. Blink Quickly (Recommend)




Step 1. Make sure the indicator blinks rapidly, if not, hold the any ON/OFF button for 7-10 seconds for reset.

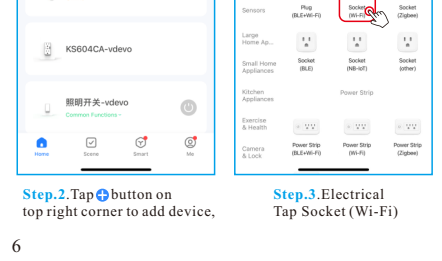

Step 2. Tap + button on top right corner to add device, Step 3. Electrical Tap Socket (Wi-Fi)

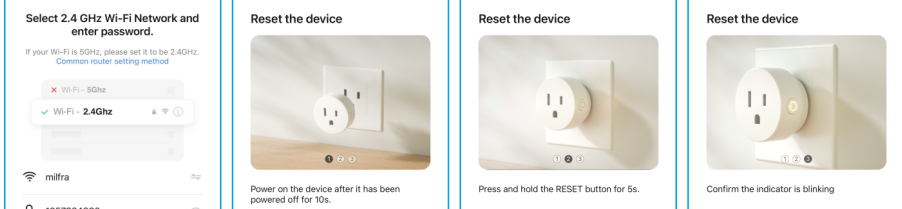

Step 4. Enter Wi-Fi password to join your network, Step 5. Power on the device and confirm, Step 6. Tap Next, Step 7. Confirm the indicator is blinking

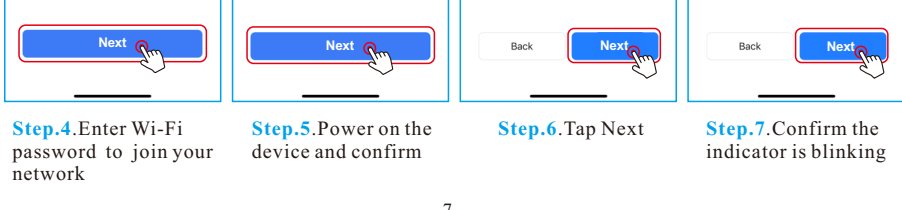

Step 8. Tap select Blink Quickly, Step 9. Wait till device is connected successfully, Step 10. Device added successfully you can modify device name.


Step C: Add the Socket to Honorlink APP

Step 2-Step 7 Steps are synchronized with pages 6 and 7


2. Blink Slowly



Step 1. When the indicator blinks rapidly, press and hold the any ON/OFF button for another 7-10 seconds, the indicator will blink slowly.

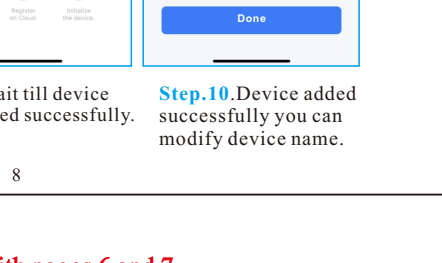



Step 8. Tap select Blink Quickly, Step 9. Tap select Go to Connect

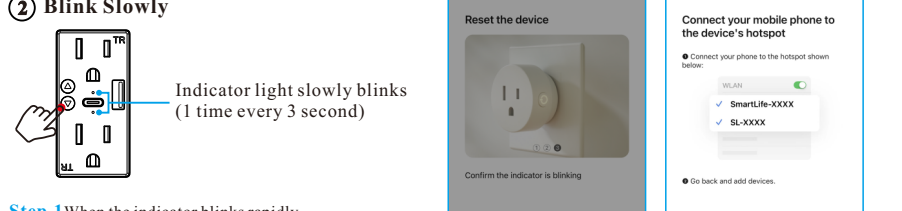

Step 10. Step 11. Step 12. Step 13.


Step D: Give a name to the switch and tap "Completed", you will find the device you've named is shown on the app home page. Tap the device to enter the setting page.

Note: The name you give to the device will be the name for voice control on Amazon Alexa or Google Home later. For example, the device is named "Socket 1" in this user guide.

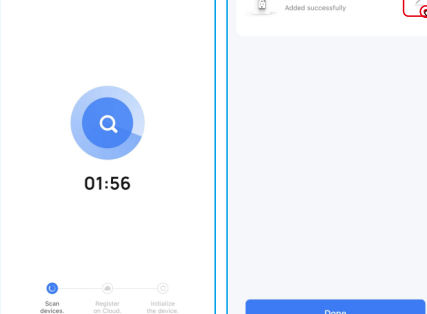

After completing Part Two, you can now control the socket with Honorlink APP on this setting page now. Note: Two socket holes can be controlled separately, long press "Socket1 or Socket2 font" to rename

Try timer function to easily set up schedule to turn on/off smart socket.
 Note: Two socket holes can be individually timed

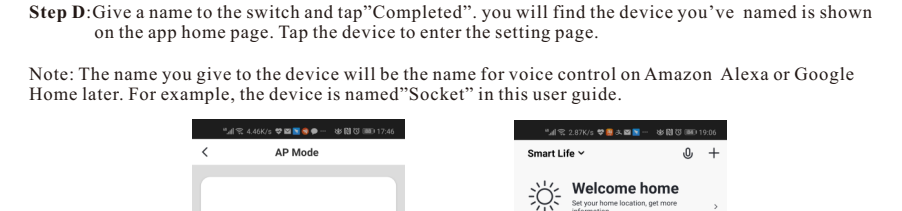

FAQ

- Please note when adding device:**
1. Confirm device is powered on.
 2. Confirm device is waiting for network configuration.
 3. Confirm that device, smart phone and router are close to each other, smart phone are unlocked.
 4. Make sure the network function of router and smart phone are unblocked.
 5. Confirm the entered router password is correct.
 6. Confirm adding device is under 2.4G Wi-Fi channel. Enable the router's encryption and not allow to hide Wi-Fi.
 7. Confirm that router's encryption method is WPA2-PSK and authentication type is AES, or both are set up as automatic.
 8. Confirm that Wi-Fi name contains letters only.
 9. If router's connected device reach the amount limit. Please try to turn off some devices Wi-Fi function and configure again.
 10. If router enables MAC address filter, please try removing the device form MAC filter list and make sure router is allowing device to be connected.

Control device under 2G/3G/4G network?

Device and smart phone must be in the same Wi-Fi environment when adding device. After successful adding, device can be control via mobile network.

How to share my device with family?

Open App, enter into "shared device", tap "add sharing" to share device with family.

How to add device?

Two methods to add device: "Default Mode" and "AP Mode". "Default Mode" is set up as default and can switch to "AP Mode"

Why can't I control the lighting after installing the product?

1. Please check if the wiring is correct.
2. Please check if there is a neutral line in the cassette (neutral line is required)
3. Please check if the connected load exceeds the maximum value of the device.